

Suspended





Description:

d/s suspended sign frame with easy change over graphics. Wide or slim versions available.



Available with frames mounted in either portrait or landscape orientation. Landscape Shown here. Frames sold assembled and without graphics.

Details:

Aluminum sign frame, non glare clear cover with side mounted end caps..

Non-glare clear covers are standard.

Clear or black anodized finished frames and matching end caps.

Supplied with stainless cable and cable clamps.


Dimensions:


Cleo frame widths available: CL60, CL70, CL80, CL100, CL120, CL150, CL180 CL200, CL-Letter, CL254, CL11, CL300, CL330, CL14, CL400, CL17, CL500, CL22, CL600.

Lengths available: 1.5" - 96".





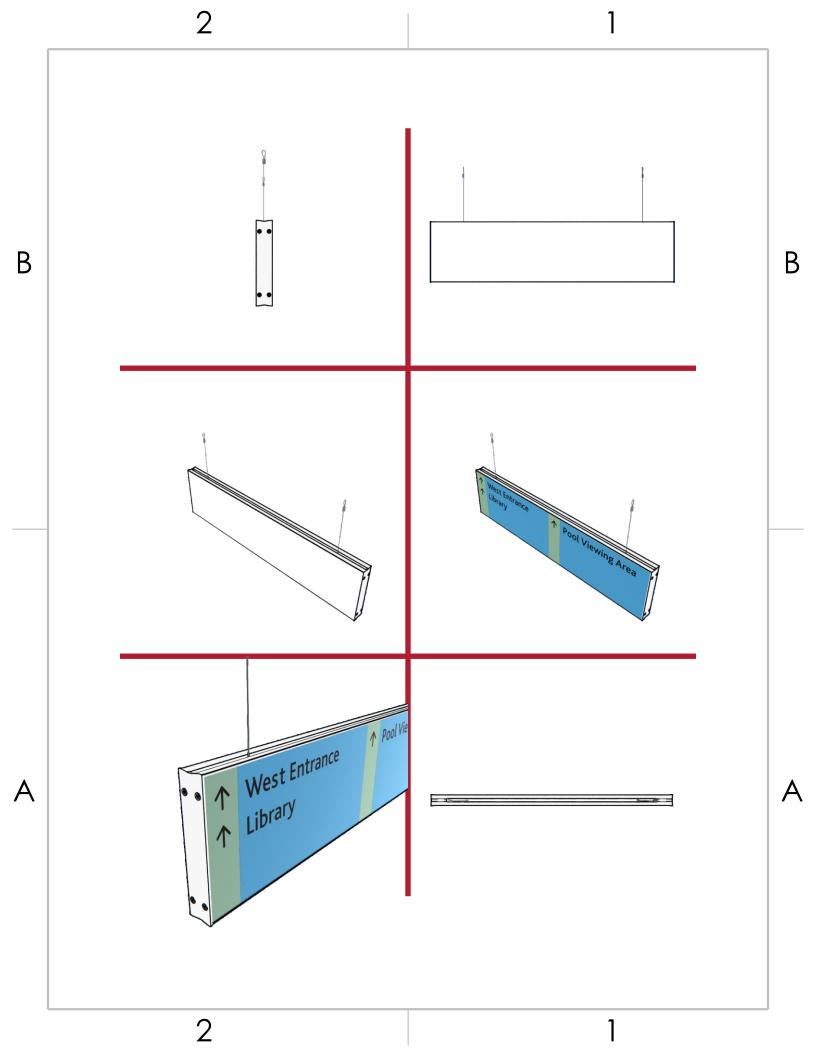

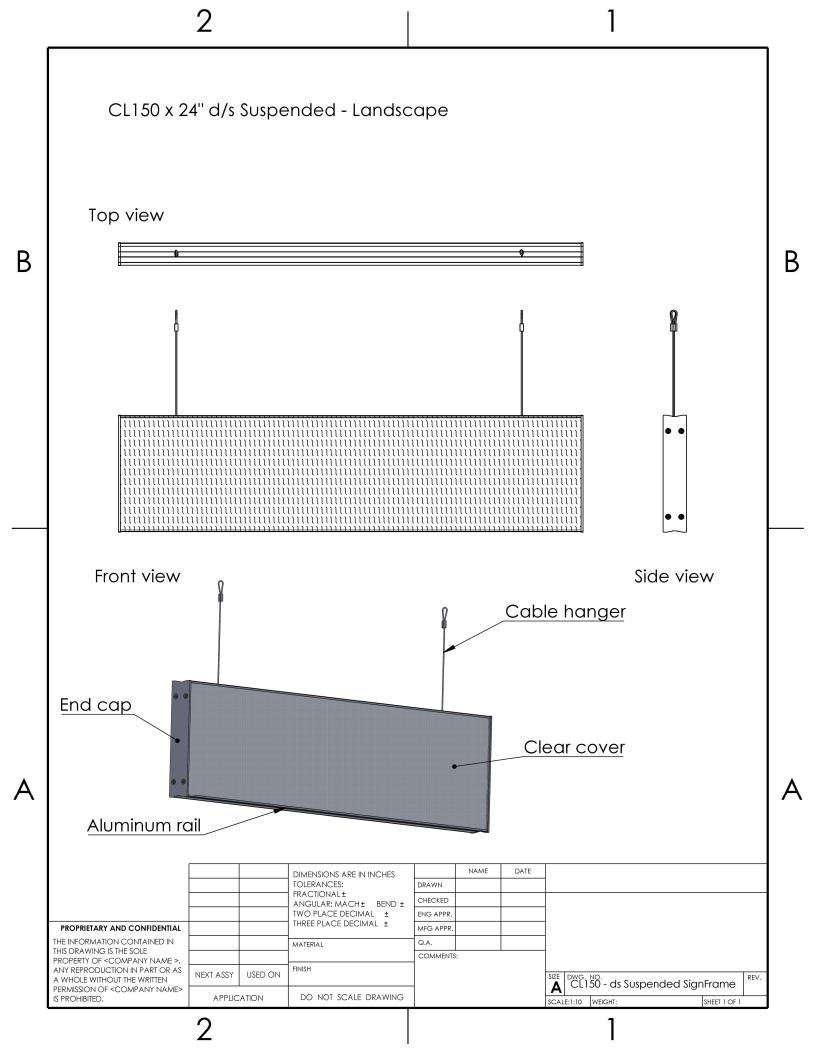



Product Guide

CLEO Series Sign Frame with Removable Clear cover Portrait & Landscape

19 Cleo frame widths available and custom cut to suit your message schedule and project details. Frames can be orientated with curve running either horizontal (portrait) or vertical (landscape). Braille & tactile compatible with all frames larger than our CL120. Variety of end cap and base plates available for desk top, cubical, projecting or free standing applications.

Portrait Format: End caps top & bottom of sign frame horizontal curve

CL150 x 8 sign frame

CL150 x 8"





Landscape Format: End caps on both sides of sign frame vertical curve

IN120 x 10"



CL150 x 8" d/s projecting



	Extrusion Style	Extrusion Width	Insert Size	
Г	CL60	2.48"/63mm	2.36"/60mm	
_	CL70	2.88"/73mm	2.76"/70mm	
Г	CL80	3.27"/83mm	3.15"/80mm	
	CL100	4.06"/103mm	3.94"/100mm	2
	CL120	4.84"/123mm	4.72"/120mm	
	CL150	6.00"/153mm	5.90"/150mm	
	CL180	7.20"/183mm	7.08"/180mm	
	CL200	7.87"/203mm	7.84"/200mm	
Г	CL-Letter	8.66"/220mm	8.50"/216mm	
	CL254	10.12"/257mm	9.96"/254mm	
Г	CL11	11.10"/283mm	11.00"/280mm	
	CL300	11.92"/303mm	11.81"/300mm	
	CL330	13.00"/333mm	13.00"/330mm	
	CL14	14.10"/359mm	14.00"/356mm	
	CL400	16.95"/403mm	15.75"/400mm	
_	CL17	17.10"/434mm	17.00"/431mm	
	CL500	19.80"/503mm	19.70"/500mm	
	CL22	22.10"/562mm	22.00"/559mm	
Г	CL600	23.75"/603mm	23.62"/600mm	



